

Pulverizer FU 1000



High performance shear for pulverizing



- Special rapid-action valve for faster movements
- Universal applicable for demolition, recycling and crushing preparation
- For excavators from 22 tons.
- Manufactured fully in special wear-resisting steel
- Hydraulic 360° endless rotation
- Reinforced surface of the dentition by overlay welding

Technical details (Subject to change)


ATTENTION: the hydraulic values indicated here after are not to be considered for the regulation of the excavator – please use the instructions!

Model	FU 1000
Possible versions	rotatable or rigid
Max. opening, mm (A)	1000
Jaw depth, mm (B)	900
Hight* without adapter, mm (C) / rigid	2.270
Hight* with adapter, mm (D) / rotatable	2.760
Jaw width, mm	540
Max. breaking force at 350 bar, to	175
Speed opening / closing (speed valve), sec.	4,2 / 2,0 (without resistance)
Weight without adapter, kg	3.100 (rotatable) / 2.950 (rigid)
Carrier weight	from 22 to
Hydraulic data	
Opening / closing, max. pressure, bar	350
Opening / closing, max. flow, l/min	275
Rotation, max. pressure, bar	200
Rotation, max. flow, l/min	20-25

* without adapterplate

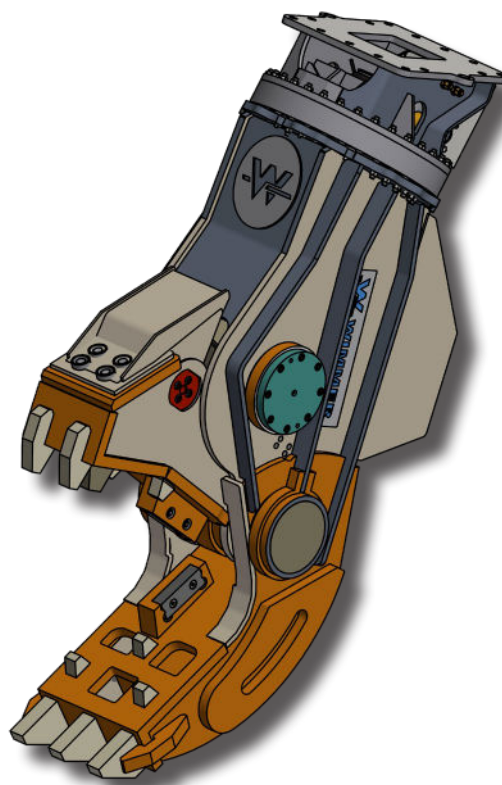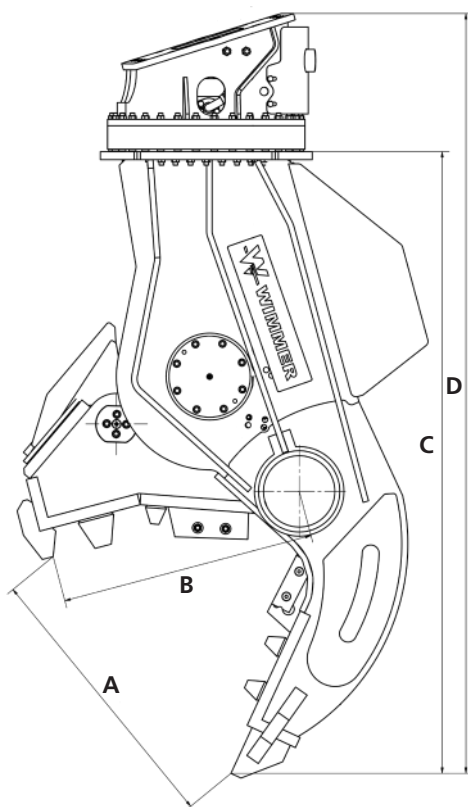

For lubrication
we recommend:
WIMMER PB-Grease



WIMMER Hartstahl GmbH & Co KG und WIMMER Felstechnik GmbH
Industriestraße 3 | A-5303 Thalgau, AUSTRIA | Tel. +43 (0)6235 6655-0

office@wimmer.info



wimmer.info