

Grapple MAMMUT



Grapple for demolition, sorting and stone positioning


- Integrated holding device keeps load even when the engine is switched off for about 30 minutes*
- Equipped with screw-on cutting edge on default*
- Body also for use with other shell forms
- Hydraulic 360° endless rotation
- Made with special wear resistant steel

* not valid for model 0.5

Technical details (Subject to change)

ATTENTION: the hydraulic values indicated here after are not to be considered for the regulation of the excavator – please use the instructions!

Model	SG 0.5	SG 1.0	SG 2.0	SG 2.3	SG 2.5	SG 3.0	SG 4.5	SG 5.5	SG 6.0
Shell width, mm (A)	500	600	600	600	700	800	1000	1100	1200
Hight without adapter, mm (B)	810	878	950	950	1100	1185	1560	1560	1480
Max. opening, mm (C)	1150	1340	1800	1800	1930	2100	2276	2276	2400
Inner hight closed, mm (D)	470	559	650	650	660	750	880	880	950
Weight without adapter, kg	270	425	700	820	1065	1565	2100	2350	2700
Closing force, to	2,5	3	4	4	5	6	8	9	10
Hydraulic data									
Open/close, max. pressure, bar	250	320	320	350	350	350	350	350	350
Open/close, oil flow, l/min	15–35	20–40	30–60	30–60	40–80	70–120	90–125	90–125	120–200
Rotation, max. pressure, bar	250	320	320	200	200	200	200	200	200
Rotation, oil flow, l/min	15–20	15–20	15–20	20–25	20–25	20–25	20–25	20–25	20–25
Excavator weight, to	4–8	6–10	10–12	12–16	16–22	20–27	26–34	30–40	38–46

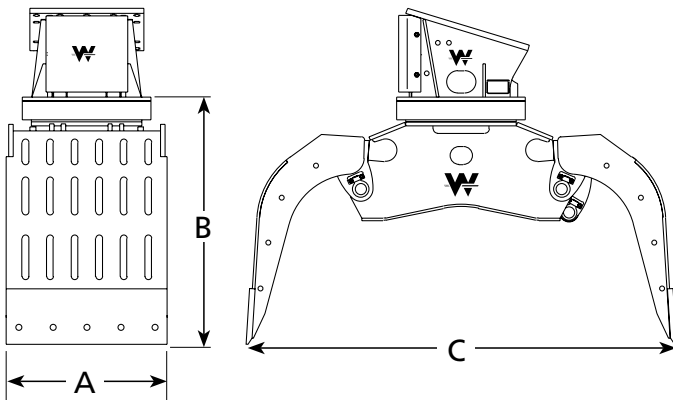

SG 0.5 to 2.0
with rotating motor



SG 2.3 to 6.0
with slewing ring

