

Stone Grapple LOBSTER






Special grapple for loading and moving stones

- **Integrated holding device keeps the load even when the engine is switched off for about 30 minutes**
- **Specially adapted shell forms for loading and moving stones**
- **For excavators from 20 up to 90 tons.**
- **Manufactured fully in special wear-resisting steel**
- **Interlocking fingers - Hardened knobs prevent load from gliding off (optional)**

Technical details (Subject to change)

ATTENTION: the hydraulic values indicated here after are not to be considered for the regulation of the excavator – please use the instructions!



Model	LO 3.0	LO 4.5	LO 5.5	LO 6.0	LO 6.5	LO 7.0
Weight without adapter, kg	1.620	2.130	2.140	3.030	4.800	~ 6.600
Stone weight, max. to	to 4	to 6	to 7	to 8	to 10	to 11
Inner hight opened, mm (A)	800	850	850	1.020	1.180	1.490
Max. opening, mm (B)	1.860	2.200	2.220	2.350	2.830	3.400
Inner hight closed, mm (C)	620	810	810	900	1000	1.350
Hight without adapter, mm (D)	1.275	1.580	1.580	1.650	1.950	2.340
Cutting width, mm (E)	950	850	850	1.000	1.400	1.550
Shell form	Type B	Type A	Type A	Type A	Type B	Type B
2 rotation motors	-	-	-	-	✓	✓
Excavator weight, to	20 - 27	26 - 34	30 - 40	38 - 45	46 - 70	70 - 90
Hydraulic data						
Open/close, max. pressure, bar	350	350	350	350	350	350
Open/close, oil flow, l/min	70 - 120	70 - 120	90 - 125	90 - 150	100 - 200	200 - 300
Rotate, max. pressure, bar	200	200	200	200	200	200
Rotate, oil flow, l/min	20 - 25	20 - 25	20 - 25	20 - 25	30 - 50	30 - 50

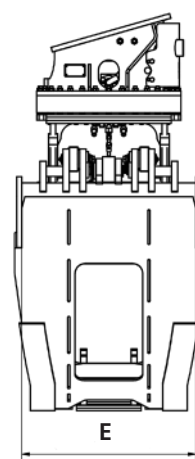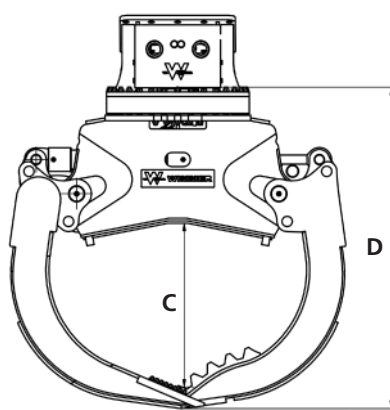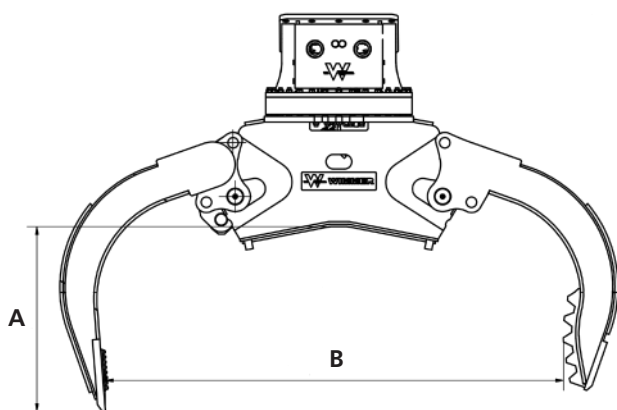

Shell forms


3 Finger/Grapple/Window = **Type A**

2/3 Finger = **Type B**

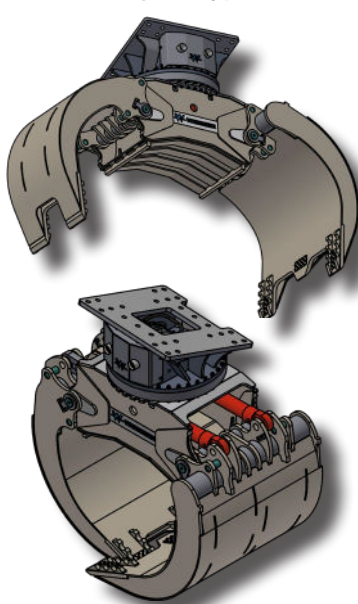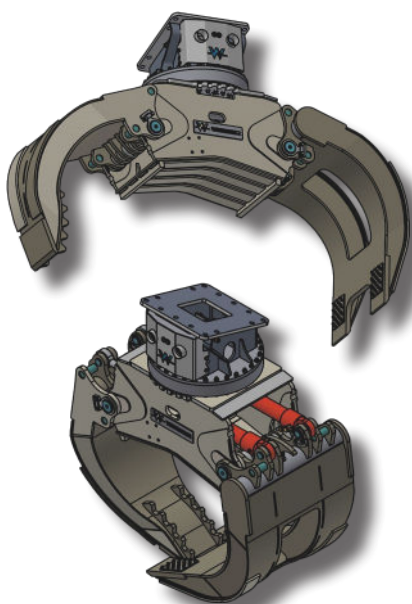

NEW: 2 rotation motors
for models 6.5 & 7.0

For lubrication
we recommend:
WIMMER PB-Grease

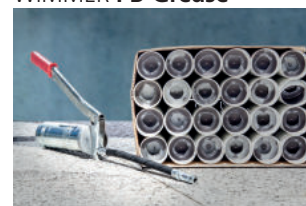

WIMMER Hartstahl GmbH & Co KG und WIMMER Felstechnik GmbH
Industriestraße 3 | A-5303 Thalgau, AUSTRIA | Tel. +43 (0)6235 6655-0

office@wimmer.info



wimmer.info